



Datenblatt - Fiche technique - Data sheet

12.03.3171




ROLINE GOLD Mini DisplayPort-VGA Adapter, Aktiv, v1.2, Mini DP ST - VGA BU

ROLINE GOLD Adaptateur Mini DisplayPort-VGA, v1.2, MiniDP M - VGA F



ROLINE GOLD Mini DisplayPort-VGA Adapter, v1.2, Mini DP M - VGA F, white

150 ± 15MM

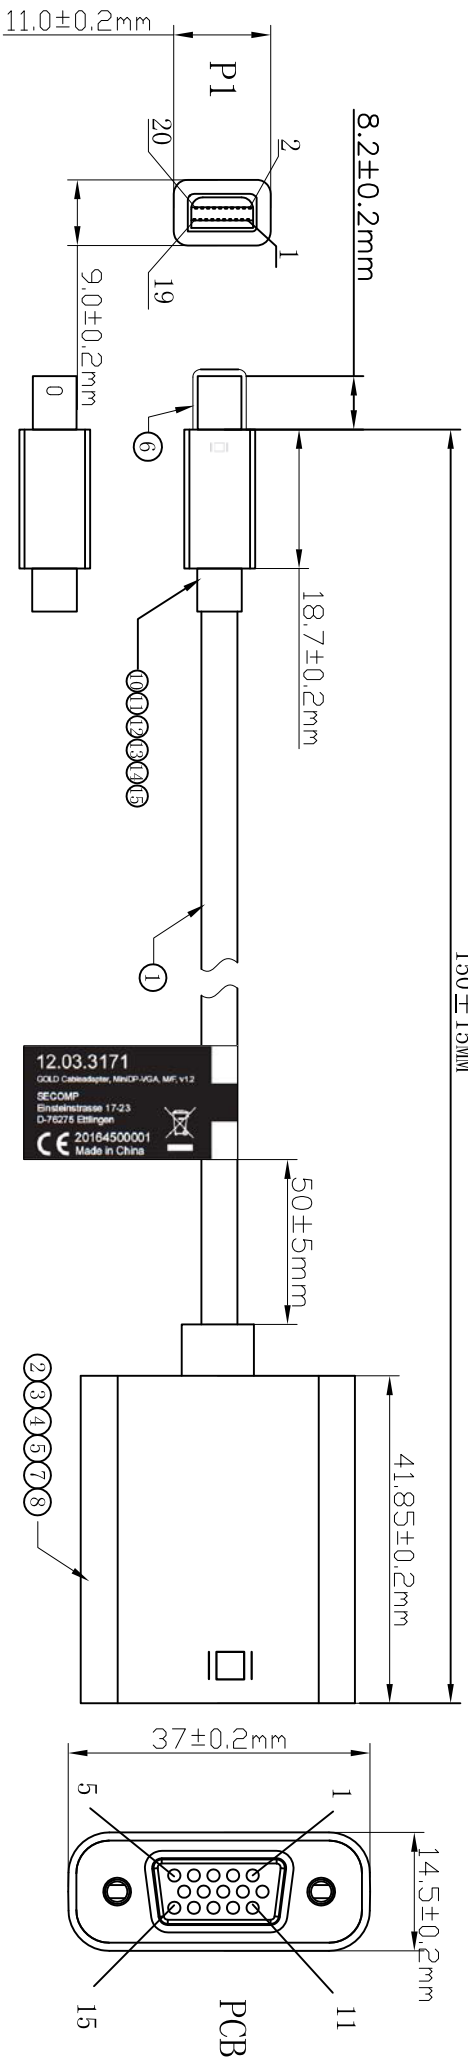

Test conditions:

1. 100% of short circuit and open circuit test & dislocation
2. Insulation impedance: 10MΩhm(MIN) DC 300V.
3. Conduction Impedance: 20hm(MAX).
4. Must be 100% Image measurement, test wear gloves when operating .

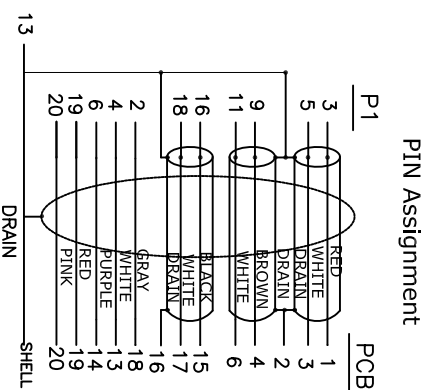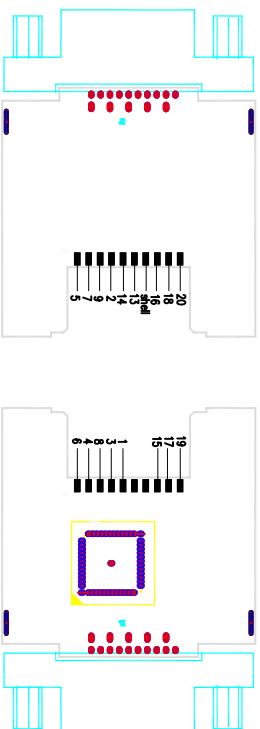

15	MDP M One-piece shell glossy ~ ABS material to gold spray paint ~OD:6.4MM~H: (COOL 8C)	1	pcs
14	MDP M One-piece former head of the glossy ~ ABS material to golden paint	1	pcs
13	Mini DisplayPort M Wire automatic welding machine with 32 awg black double rows	1	pcs
12	φ 1.0 Black heat shrinkable casing	0.016	m
11	Transparent PE ROHS LDPE	5	g
10	Mini DisplayPort M WHITE INSULATION SHELL PLATED:GOLD CONTACT:3U"	1	pcs
9	MINI DP TO PCB dedicated 34 awg wire clip black	1	pcs
8	#4-40UNC H4.75*8.6MM GOLD NUT (NUT H=4.8MM)	2	pcs
7	φ 0.8 Black heat shrinkable casing	0.018	m
6	mini Display Port M Transparent dust cover	1	pcs
5	VGA F One-piece former head of the glossy ~ ABS material to golden paint	1	pcs
4	VGA F One-piece shell glossy ~ ABS material to gold spray paint ~OD:6.4MM~PRINT: (COOL 8C)	1	pcs
3	65P BLACK PVC ROHS	4	g
2	MP-V (PTN3355) EMPTY PCB+SMT+(VGA CONNECTOR GRAY INSULATION PLATED:GOLD)	1	pcs
1	Display Port UL20276(3AWG(7/0.06TC)*1P+EAM)*3C+32AWG(7/0.08TC)*5C+AEB (16/5/0.12MM 85%AL) OD:4.5MM BLACK NO MARKING	0.15	M
NO	DESCRIPTION	Q'TY	UNIT

REV	ECN	TOLERANCE	DESCRIPTION	DATE	NAME
		INCHES M/M			
		.015 .30			
		.XX .10			
		.XXX .005 .05			
TITLE:			SECOCMP		
ROLINE GOLD Cable Adapter: mini DP M-VGA F, v1.2, 15cm					
CUSTOMER:			12.03.3171		
CUSTOMER P/N:					
SCALE			NONE		
UNIT			MM		
DATE			2016.11.25		
DRAWING NO.:			D04089-00161		
REV.			A01		
APPD BY			1/1		