


Item no.	Length (L)	Tolerance
11.99.5731	1000 mm	± 20 mm
11.99.5732	2000 mm	± 30 mm
11.99.5733	3000 mm	± 50 mm

**Pin Out**

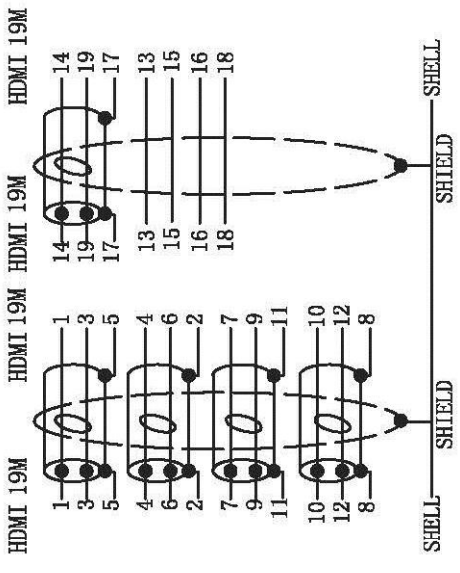

No	Material	Specification	Unit	QTY	Remarks
①	Cable	UL20276 (1P*30#+AL+D+M)*5C+3C*30#+1C*30#+AL+D+B OD6.5 1.4V 160AL black printing: High Speed HDMI™ Cable With Ethernet E119932-T Ⅴ AWM STYLE 21104 80°C 30V VW-1 COPARTNER RoHS	M	L	
②	Connector	HDMI 19P M Nickel Plated RoHS	PCS	2	
③	Tin line	Lead-free Green Wire OD0.8 1000g RoHS	G	0.56	20*14g
④	Tube (1)	Black Shrink-Heat Tube OD:1.0MM RoHS	M	0.220	10*22mm
⑤	Tube (2)	Black Shrink-Heat Tube OD:2.5MM RoHS	M	0.110	10*11mm
⑥	Inner mold	LD-PE RoHS	KG	0.004	
⑦	Mask Tape	2.3CM RoHS	M	0.12	2*60mm
⑧	Copper foil	2.9CM Copper Foil RoHS	M	0.12	2*60mm
⑨	Outer mold	Black PVC A813 60P RoHS	KG	0.018	
⑩	Dust cover	Dust cover PE Material RoHS	PCS	2PCS	

Test parameters: insulation resistance: 10MΩ conduction impedance: 5Ω high-pressure test: 300v

**rotronic**

11.99.5731 (1.0m); 11.99.5732 (2.0m); 11.99.5733 (3.0m)

VALUE HDMI High Speed Cable, w/Ethernet, A-A, M/M, LSOH, black



Unit: mm

CHECKED BY ENGINEER

Version: A/0

APPROVED BY SALES