


PIN Assignment



- ELECTRICAL TEST:**
- 1.100% OPEN & SHORT & MIS WIRE TEST
 - 2.CONTACT RESISTANCE:2 OHM(MAX)
 - 3.INSULATION RESISTANCE:10M OHM(MIN)
 - 4.HI-POT TEST:DC 300V/10ms

NO	Q'TY	UNIT	DESCRIPTION	REV.	ECN	TOLERANCE		DATE	NAME
						INCHES	M/M		
9	4	g	Transparent PE material						
8	10	g	45 p black PVC						
7	2	pcs	DisplayPort Port M ~28AWG Wire rack						
6	0.034	m	φ 1.5~Black heat shrinkable casing ~ 17mm*2pcs.			.X	.30		
5	2	pcs	DisplayPort M~Transparent dust cover			.XX	.10		
4	2	pcs	DisplayPort (DP01#) M ~Down Shell~ABS~Black			.XXX	.05		
3	2	pcs	DisplayPort (DP01#) M ~UP Shell~ABS~Black						11.99.5761
2	2	pcs	DisplayPort Port M~connector~Nickel plated iron shell						
1	1.02	m	Display Port UL20276 (7/0.127TC*1PR+EAM)*5+7/0.127TC*5C+AEB(AL)85% OD:7.3MM~black~LSZH						
NO									

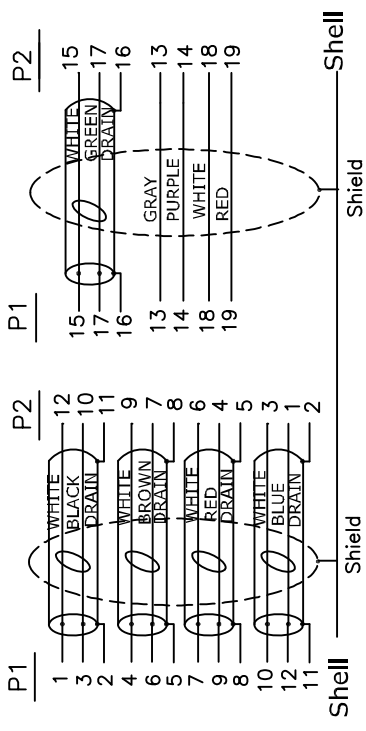

VALUE DisplayPort Cable, DP-DP, M/M, 1m, black, LSOH

Item No.	11.99.5761		
SCALE	NONE	DRAWING NO.:	
UNIT	MM		
DATE	2015.07.23		
REV. A01			1/2