


PIN Assignment

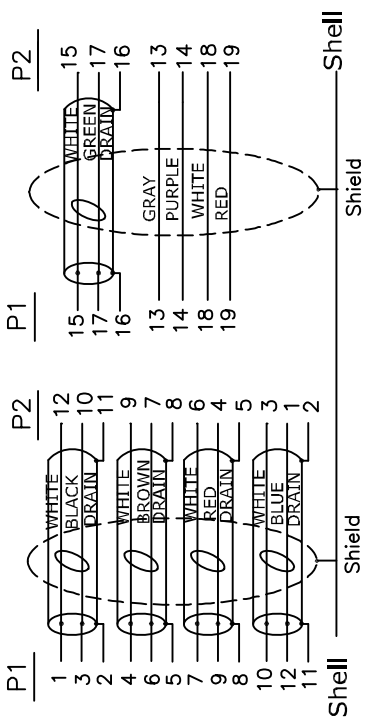

- ELECTRICAL TEST:  
 1.100% OPEN & SHORT & MIS WIRE TEST  
 2.CONTACT RESISTANCE:2 OHM(MAX)  
 3.INSULATION RESISTANCE:10M OHM(MIN)  
 4.HI-POT TEST:DC 300V/10ms

REV	ECN	DESCRIPTION	DATE	NAME
9	9	Transparent PE material		
8	10	45 p black PVC		
7	2	DisplayPort Port M ~28AWG Wire rack		
6	0.04	1.5~Black heat shrinkable casing ~ 17mm*2pcs.		
5	2	DisplayPort M~Transparent dust cover		
4	2	DisplayPort (DP01 #) M ~Down Shell~ABS~Black		
3	2	DisplayPort (DP01 #) M ~UP Shell~ABS~Black		
2	2	DisplayPort Port M~connector~Nickel plated iron shell		
1	2.02	Display Port UL20276 (7/0.127TC*1PR+EAM)*5+7/0.127TC*5C+AEB(AL)85% OD:7.3MM~black~LSZH		
NO		DESCRIPTION		
		Q'TY	UNIT	
4	9			
10	9			
2	pcs			
0.04	m			
2	pcs			
2	pcs			
2	pcs			
2	pcs			
2.02	m			
9	9			
		REV	DATE	NAME
		SCALE	DRAWING NO.:	REV. A01
		UNIT	MM	1/3
		DATE	2015.07.23	
		Item No.	11.99.5762	
		DESCRIPTION	VALUE DisplayPort Cable, DP-DP, M/M, 2m, black, LSOH	
		<b>SECOMP</b>		