





USB 3.0 A Male

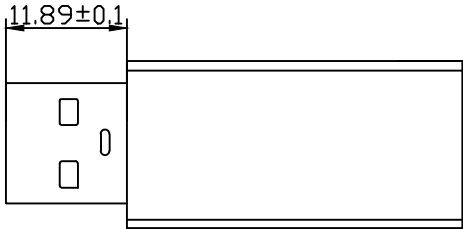

USB Type C Female

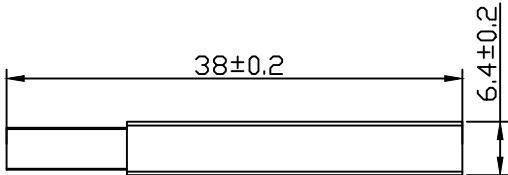

PIN OUT

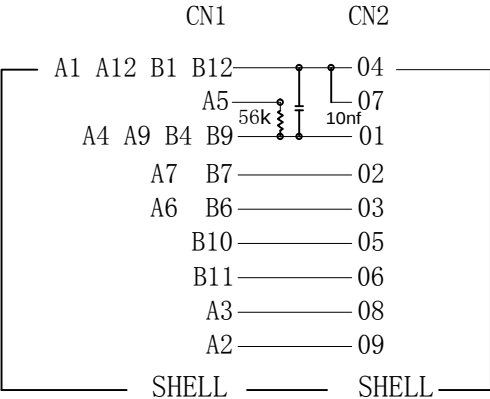

MATERIAL LIST:

③	Housing	Aluminium Shell Black	1	
②	Connector	USB 3.0 A male,Blue insulation The Pin Gold Plating,the Shell For Nickel plating	1	
①	Connector	USB Type C Female,Black insulation The Pin Gold Plating,the Shell For Nickel plating	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2019-06-17	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

NOTES:

- 1.Electrical test:
(1).100% open short & miss wire test;
(2).Insulation resistance:DC 300V 10MΩ Min;
(3).Contactor resistance:3Ω Max;
USB 3.2 GEN1 Type C Female Output,USB 3.0 A male input
Data Transfer: 5Gbps Voltages:5V Current:900mA
RoHS 2.0 and REACH Compliant

Item No. :	12. 99. 2998
DESC.	VALUE USB 3.2 Adapter, A-C, M/F, black

