
INSTALLATION INSTRUCTIONS



Small Swivel Table Stand

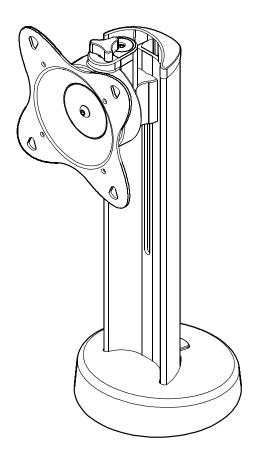

STS1

DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



IMPORTANT SAFETY INSTRUCTIONS

WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.



CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.

WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.




WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.



WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components attached to the STS1 up to (and including) the display does not exceed 30 lbs (13.6 kg). Use with products heavier than the maximum weight indicated may result in collapse of the mount and its accessories causing possible injury.

-- SAVE THESE INSTRUCTIONS--

DIMENSIONS

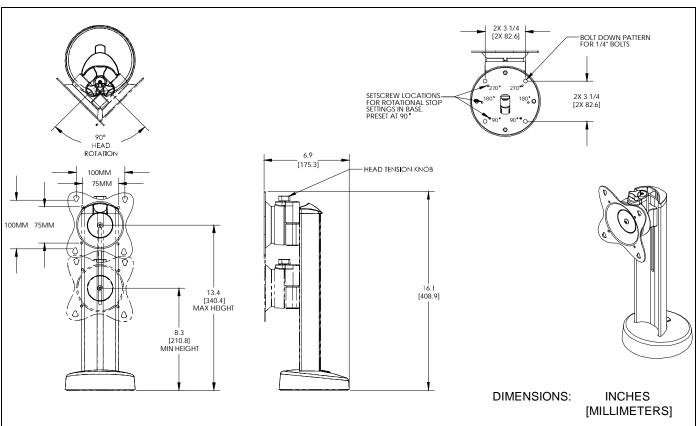


Installation Instructions STS1


LEGEND

	Tighten Fastener	Pencil Mark
G	Apretar elemento de fijación	Marcar con lápiz
	Befestigungsteil festziehen	Stiftmarkierung
	Apertar fixador	Marcar com lápis
	Serrare il fissaggio	Segno a matita
	Bevestiging vastdraaien	Potloodmerkteken
	Serrez les fixations	Marquage au crayon
	Loosen Fastener	Drill Hole
9	Aflojar elemento de fijación	Perforar
	Befestigungsteil lösen	Bohrloch
	Desapertar fixador	Fazer furo
	Allentare il fissaggio	Praticare un foro
	Bevestiging losdraaien	Gat boren
	Desserrez les fixations	Percez un trou
	Phillips Screwdriver	Adjust
(F)	Destornillador Phillips	Ajustar
	Kreuzschlitzschraubendreher	Einstellen
	Chave de fendas Phillips	Ajustar
	Cacciavite a stella	Regolare
	Kruiskopschroevendraaier	Afstellen
	Tournevis à pointe cruciforme	Ajuster
68	Open-Ended Wrench	Remove
	Llave de boca	Quitar
	Gabelschlüssel	Entfernen
	Chave de bocas	Remover
	Chiave a punte aperte	Rimuovere
	Steeksleutel	Verwijderen
	Clé à fourche	Retirez
	By Hand	Optional
	A mano	Opcional
	Von Hand	Optional
	Com a mão	Opcional
	A mano	Opzionale
	Met de hand	Optie
	À la main	En option
	Hex-Head Wrench	Security Wrench
	Llave de cabeza hexagonal	Llave de seguridad
	Sechskantschlüssel	Sicherheitsschlüssel
	Chave de cabeça sextavada	Chave de segurança
	Chiave esagonale	Chiave di sicurezza
	Zeskantsleutel	Veiligheidssleutel
	1 1	

TOOLS REQUIRED FOR INSTALLATION

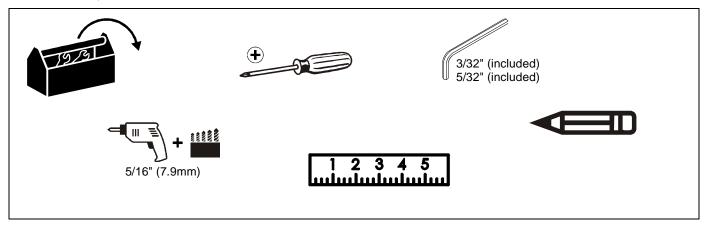

PARTS

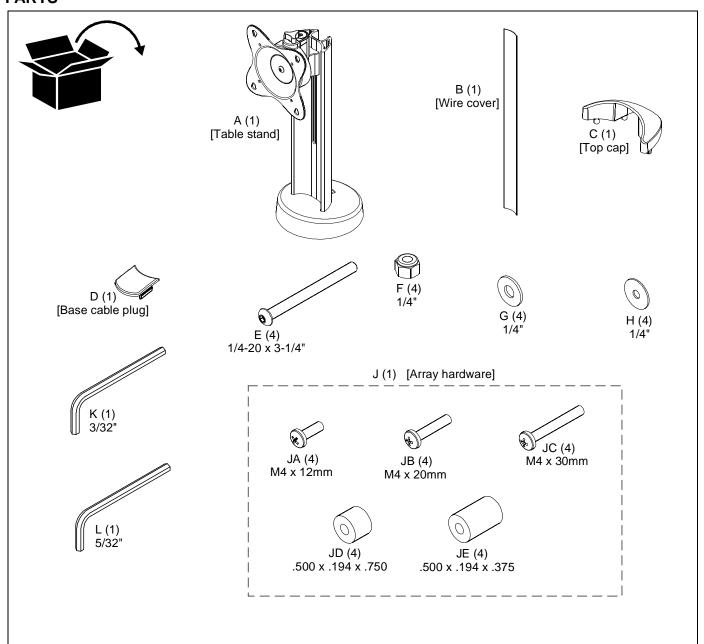

Installation Instructions STS1

INSTALLATION

Site Preparation

WARNING: EXCEEDING WEIGHT CAPACITY CAN RESULT IN SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! It is the installer's responsibility to make sure the combined weight of all components attached to the

STS1 up to (and including) the display does not exceed 30 lbs

(13.6 kg).

WARNING: TURNING DISPLAY CAN CAUSE DAMAGE TO SURROUNDING OBJECTS. Make certain location provides enough area for the display to rotate ± 270° without being obstructed, or lock display to a lesser rotation before rotating for the first time.

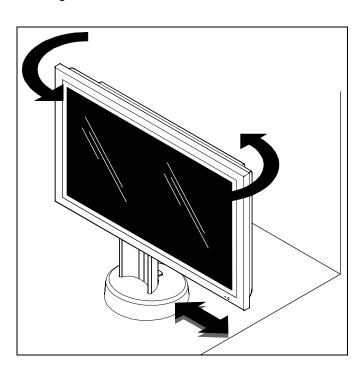


Figure 1

IMPORTANT!: The STS1 is shipped with the display rotation set at the minimum of 90°. Base rotation may be adjusted to 90°, 180° or 270° and locked if installation location requires it. (See Figure 2)

Display head rotation may be adjusted in any increment between 0° and 90°.

Setting Rotation Limits

- Base rotation is factory-set at 90° but may be changed to 180° or 270° to allow necessary rotation. (See Figure 1)
- Remove and save setscrews from two 90° holes in base using 3/32" hex key (K). (See Figure 2)
- 3. Determine amount of rotation required in installation.
- Place setscrews into the appropriate holes (180° or 270°) and tighten to secure rotation amount. (See Figure 2)

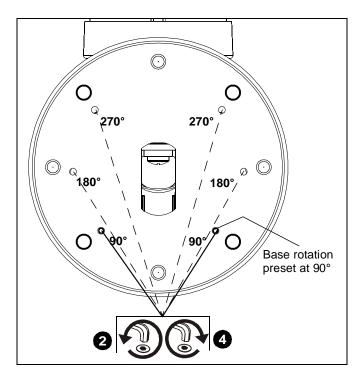


Figure 2

Attaching STS1 to Mounting Surface

- Locate a flat surface (thickness of 3/4" minimum to 2-1/2" maximum) on which to mount the STS1 assembly.
- Carefully raise STS1 base cover and affix to STS1 column using a piece of tape. (See Figure 3)
- 3. Mark four mounting hole locations on mounting surface. (See Figure 3)

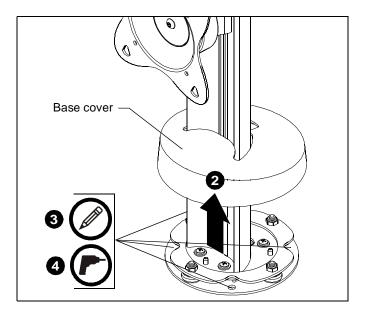


Figure 3

 Drill four 5/16" diameter (7.9mm) holes through mounting surface at marks, and an optional 1-5/8" diameter (41.3mm) cable management hole. (See Figure 3)

- Attach STS1 to mounting surface using 5/32" hex key (L) and four 1/4-20 x 3-1/4" button head cap screws (E), four flat 1/4" flat washers (G), four 1/4" fender washer (H), and four 1/4" Nylock nuts (F). (See Figure 4)
- Lower STS1 base cover.




Figure 4

Attaching Display

WARNING: IMPROPER INSTALLATION CAN LEAD TO DISPLAY FALLING CAUSING SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! Using screws of improper size may damage your display. Properly sized screws will easily and completely thread into display mounting holes. If spacers are required, be sure to use longer screws of the same diameter.

 Select correct screws, spacers (if necessary) from the hardware bag (J) and attach STS1 to back of display. (See Figure 5)

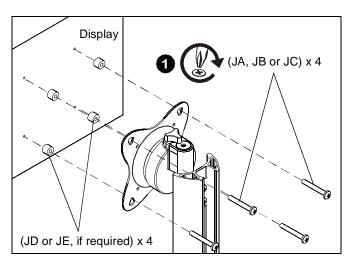


Figure 5

Cable Management

- 1. Run power cables from display to the back of the STS1.
- 2. Lay power cables down back and through bottom of STS1, and through mounting surface.
- Add wire cover (B) to back of STS1 by sliding it into the STS1 through the top. (See Figure 6)
- 4. Add top cap (C) to top of STS1. (See Figure 6)
- 5. Add base cable plug (D) to STS1 base. (See Figure 6)

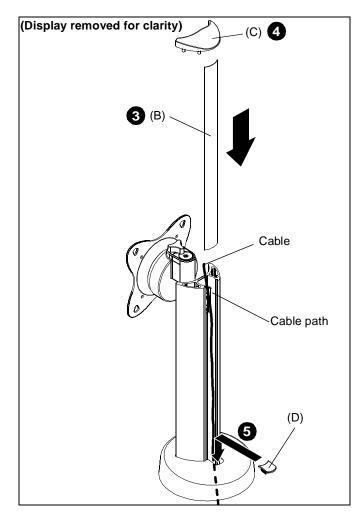


Figure 6

Installation Instructions STS1

Adjustments

Rotating Display

 The display may be rotated up to 90° on the STS1 head by using the 5/32" hex key (L) to loosen the fastener, rotating the head in either direction, and tightening the fastener. (See Figure 7)




Figure 7

Display Roll, Pitch, Yaw Tension

The display roll, pitch and yaw tension can be adjusted either using the tension adjustment knob, or the hex fastener on the head assembly.

Tension Adjustment Knob

- Turn the tension adjustment knob counter-clockwise to decrease tension. (See Figure 8)
- 2. Adjust STS1 head and display as required.
- 3. Turn adjustment knob clockwise to increase tension.

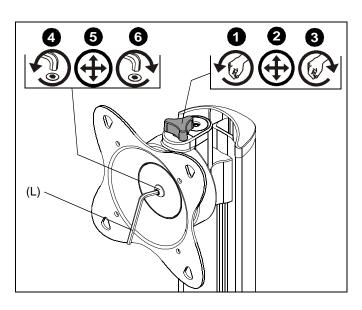


Figure 8

Head Assembly Hex Fastener

- Loosen the head assembly hex fastener using the 5/32" hex key (L) to decrease tension. (See Figure 8)
- 5. Adjust STS1 head as required.
- 6. Tighten head assembly hex fastener to increase tension.

Raising/Lowering Display

- Loosen, but do not remove, two Phillips head screws on back of STS1 assembly. (See Figure 9)
- 2. Adjust display and head assembly to necessary height.
- Tighten two Phillips head screws on back of STS1 assembly. (See Figure 9)

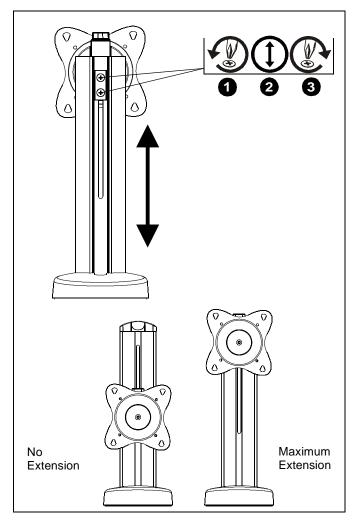


Figure 9



Our Mounts. Your Vision.

Chief, a products division of Milestone AV Technologies

8804-002015 Rev02 ©2014 Milestone AV Technologies www.chiefmfg.com 04/14 **USA/International** A 6436 City West Parkway, Eden Prairie, MN 55344

P 800.582.6480 / 952.225.6000

F 877.894.6918 / 952.894.6918

Europe A Franklinstraat 14, 6003 DK Weert, Netherlands

P +31 (0) 495 580 852

F +31 (0) 495 580 845

Asia Pacific A Office No. 1 on 12/F, Shatin Galleria

18-24 Shan Mei Street Fotan, Shatin, Hong Kong

P 852 2145 4099

F 852 2145 4477

