

# rotronic

**Datenblatt - Fiche technique - Data sheet**

**S3151 ~ S3153**




**USB 2.0 Kabel, USB A ST – Micro USB B ST**

**Câble USB 2.0, USB A mâle – Micro USB B mâle**

**USB 2.0 Cable, USB Type A M – Micro USB B M**


REV	DESCRIPTION

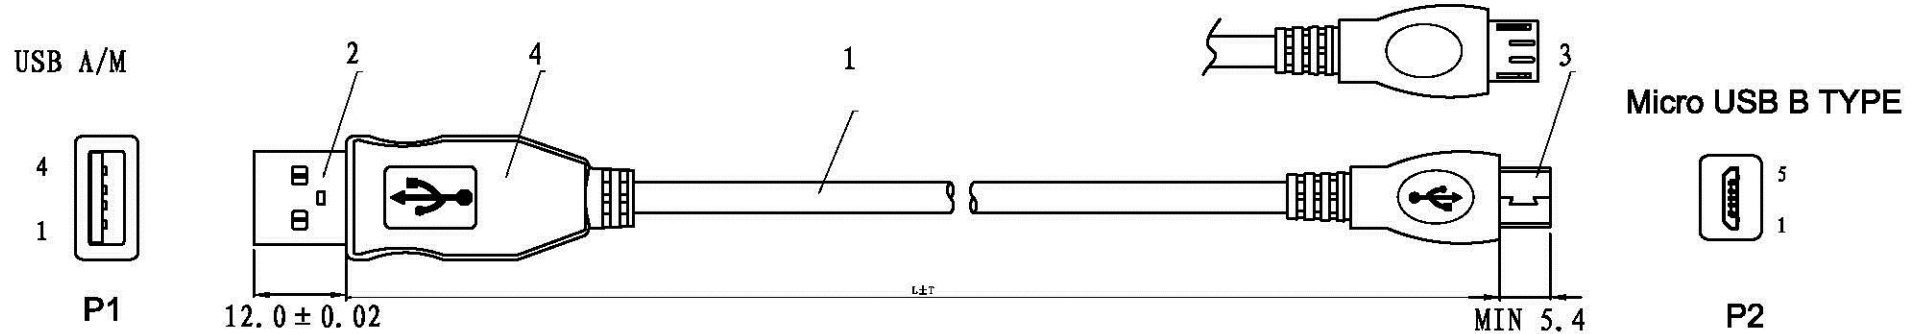

PRODUCT FAMILY	
L<LENGTH>	T<TOLERANCE>
S3151	0.8M 0.02M
S3152	1.8M 0.03M
S3153	3M 0.05M

PINOUT	
USB A/M	Micro USB B TYPE
P1	P2
1	1 RED
2	2 WHITE
3	3 YELLOW
4	5 BLACK
G	G GROUND

### CABLE STRUCTURE

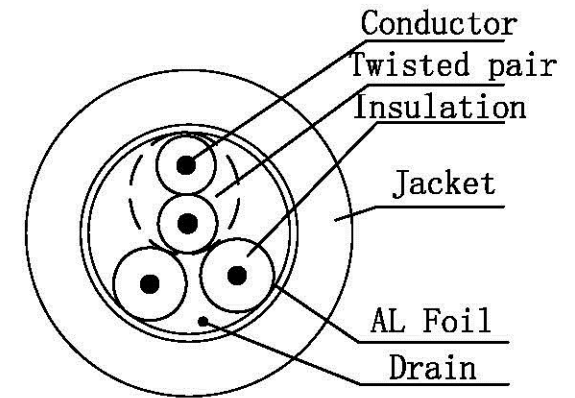

### NOTE

- Electrical test:
  - 100% open short and miss wire test;
  - Insulation resistance: DC300V/5s 10Mohm min;
  - Dielectric strength: 150V AC/minute, 1mA.
- Package: Polythene bag
- COLOR: Beige (Pantone #420C)

<b>rotronic</b>		DESCRIPTION		USB CABLE				
		Product No.		USB A/M-Micro USB(B)				
DRAW		YUAN		CONSUMER		S3151~S3153		
CHECK		DATE		2008/10/26		REV.	A/0	
APP.		SHEET		1/1	UNIT	mm	SCALE	1:1

4		MOLDING	PVC	2	Beige
3		CONN-P2	Micro USB TYPE B	1	NICKEL
2		CONN-P1	USB A/M	1	NICKEL
1		CABLE	(7/0.12CU+PE)*1P+(7/0.12+PE)*2C+AL+PVC OD:4.0MM	1	Beige
NO.	PART NO.	PART NAME	MATERIAL	Q' TY	REMARKS